

# Control4® T3 Series In-Wall Touch Screens



## Control4 T3-7 7" In-Wall Touch Screen (C4-WALL7-BL, C4-WALL7-WH) Control4 T3-10 10" In-Wall Touch Screen (C4-WALL10-BL, C4-WALL10-WH)

The Control4 T3 Series In-Wall Touch Screens deliver always-on, dedicated control over all the technology in your home or business. Featuring gorgeous, low-profile designs with edge-to-edge glass and stunning, high-resolution graphics, these touch screens look amazing on any wall. All models include HD video intercom and crystal-clear audio intercom for convenient communications from room to room or with visitors at the door.

- Available in 7" and 10" versions, the T3 Series In-Wall Touch Screens provide dedicated and elegant control of your home.
- HD camera, combined with speakers and microphone, provides the best intercom experience yet.
- Crisp picture with two and a half times the resolution of previous models.
- Extremely fast and responsive—up to 16 times faster than our previous touch screens.
- Compatible with virtually any new or existing home with options for power (AC or PoE) and network connectivity (Ethernet or WiFi).
- Video intercom integration with the following door stations and touch screens: Door Station (C4-DSC-EN), T3 Series Tabletop Touch Screen (C4-TT7), and legacy touch screens (C4-TW7CO, C4-TSMC7).
- Audio intercom integration with the door station and the following touch screens: T3 Series Tabletop Touch Screen (C4-TT7) and legacy touch screens (C4-TW7CO, C4-TSMC7, C4-TSWMC5, C4-TSWMC7).
- Easy to upgrade—T3 Series In-Wall Touch Screens are compatible with legacy Control4 touch screen back boxes.
- Available in gloss white or black.

## Control4® T3 Series In-Wall Touch Screens


Model numbers	C4-WALL7-BL, C4-WALL7-WH, C4-WALL10-BL, C4-WALL10-WH
<b>Features</b>	
Screen	Resolution: 1280 × 800 Capacitive touch Camera: 720p
Network	Ethernet or WiFi (802.11b/g/n [2.4 GHz]) Security: WEP, WPA/WPA2 PSK, 801.1x EAP, PEAP Notes: (1) 802.11b is not recommended for Video Intercom. (2) Wireless-N is recommended for Video Intercom. The more devices that Video Intercom is broadcast to, the more response time and images are degraded.
Power supply	PoE (IEEE802.3af) 13 W peak 100-240VAC, 50/60 Hz
<b>Environmental</b>	
Operating temperature	32 - 104°F (0° - 40°C)
Storage temperature	32 - 104°F (0° - 40°C)
Dimensions (W × H × D)	7" model: 6.9" × 4.9" × 0.53" (176 × 125 × 13 mm) 10" model: 9.5" × 6.6" × 0.53" (242 × 169 × 13 mm)
Weight (with mid-box)	7" model: 0.9 lbs (0.41 kg) 10" model: 1.5 lbs (0.68 kg)
Shipping Weight	7" model: 1.5 lbs (0.68 kg) 10" model: 2.1 lbs (0.95 kg)

### Planning the installation

- Required: In-Wall Touch Screen Wall Box
  - For retrofit: C4-RWB57C-P (plastic) or C4-RWB57C-M (metal)
  - For new construction: C4-NWB57C-P (plastic) or C4-NWB57C-M (metal)
- Determine the method of powering the device (AC power or PoE) and wire accordingly.
- If you have a choice between WiFi and Ethernet, we recommend Ethernet.
- If using WiFi, make sure each touch screen location has a strong WiFi signal.
- Make sure the touch screen's WiFi or Ethernet connection is on the same network as your controller and that the signal is strong.
- Communication agent is required for intercom use.

### For more product information

Visit [ctrl4.co/t3series](http://ctrl4.co/t3series)

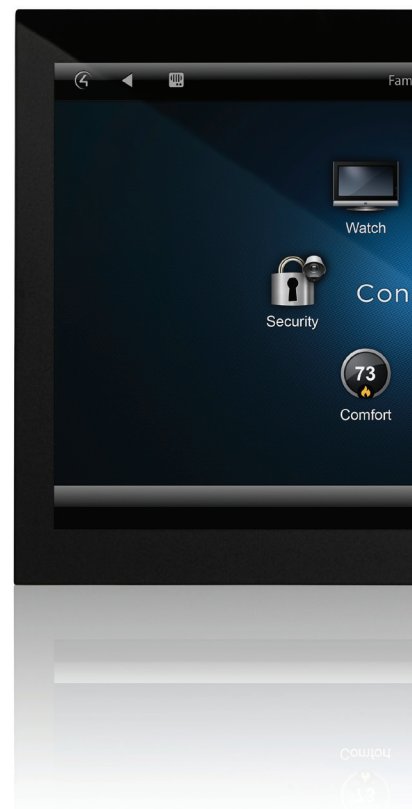

# T3 In-Wall Touch Screen Template

Note: Print settings must be set to print full size, with no scaling

