


VandalVeto



VV's Industry standard 125 KHz generic prox cards can be used with any of VV readers, which contain an internal prox card reader




;Note VV provides a variety of prox/RFID cards

- Industry standard generic 125 KHz (thick/clamshell)
- Industry standard generic 125 KHz (thin/ ISO 0.8 mm)
- 13.56 MHz Mifare (thin only)
- HID 125 KHz
- HID iClass (thin only)

RFID disk diameter 22.22 mm (7/8 inch) RFID thickness 1.59 mm (1/16 inch)

When ordering VV readers, be sure to specify which card reader technology and cards you need PRIOR to placing your order.

Since customers sometimes are already using existing non-VV card readers and cards, VV also provides 125 KHz key fobs which can be clipped on to cards having a badge clip ;slot

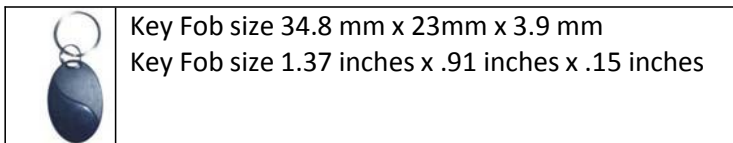

Key Fob size 34.8 mm x 23mm x 3.9 mm
Key Fob size 1.37 inches x .91 inches x .15 inches

And for customers having non-VV cards with no badge clip slot, we also offer 125 KHz self-adhesive RFID discs ;which can be easily adhered

Technical Details

125 KHz (generic prox or HID)

- Read-only

13.56 MHz (Mifare or HID iClass)

- Read-only

White PVC

Passive prox/RFID responder

Thick clamshell card dimensions

Length: 3.36 inches (85.47 mm)

Width: 2.12 inches (53.85 mm)

Thickness .077 inches (1.97 mm)

Badge clip slot .63 inches X .13 inches

Thin ISO card dimensions

Length: 3.36 inches (85.47 mm)

Width: 2.12 inches (53.85 mm)

Thickness .03 inches (.8 mm)

Badge clip slot .63 inches X .13 inches

Badge clip slot 16 mm X 3.30 mm